



PULLERS

MECHANICAL PULLERS

Mechanical pullers are available in-various models such as 2/3 jaws, bar, interchangeable and other special types.



A Jaw Type

2 & 3 jaws puller sets are suitable for applications such as bearings, gears, pulleys etc. These pullers have a set of reversible jaws i.e. equally adaptable for external as well as internal jobs.

SPECIFICATIONS

Model No.	No. of Jaws.	Spread		Maximum Reach (mm)	Rated Capacity (Tonnes)	Approx Weight (Kgs)
		Inside	Outside			
MPM-021	2 Jaws	60/175	32/130	60	2.0	2.9
MPM-022	3 Jaws	40/125	40/100	60	3.0	3.5
MPM-101-S	2 Nos. Short Jaws	63/180	50/210	135	6.5	3.7
MPM-101-L	2 Nos. Long Jaws	80/200	50/250	200	6.5	4.3
MPM-101	2 Nos. Short Jaws	63/180	50/210	135	6.5	5.5
	2 Nos. Long Jaws	80/200	50/250	200	6.5	--
MPM-102-S	3 Nos. Short Jaws	63/180	50/210	135	10.0	4.6
MPM-102-L	3 Nos. Long Jaws	80/200	50/250	200	10.0	5.8
MPM-102	3 Nos. Short Jaws	63/180	50/210	135	10.0	8.2
	3 Nos. Long Jaws	80/200	50/250	200	10.0	--
MPM-201	2/3 Jaws	—	75/500	475	20.0	31.0

Model No.	Spread		Maximum Reach (mm)	Rated Capacity (Tonnes)
	Inside	Outside		
MPMI-030	15	30	25	1
MPMI-050	20	50	50	2

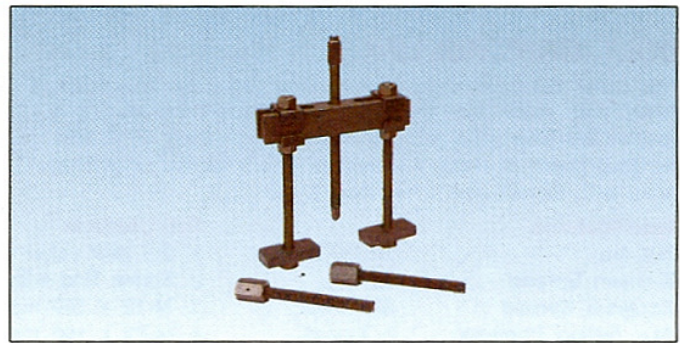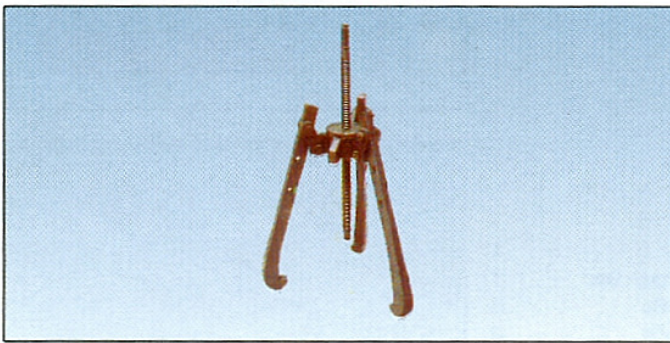

B Bar Type

SPECIFICATIONS

Model No.	No. of Jaws	Spread		Maximum Reach (mm)	Rated Capacity (Tonnes)	Approx Weight (Kgs.)
		Inside	Outside			
MPM-103	Bar type puller	-	75/195	380	5	6.5
MPM-202	Bar type puller	-	150/375	600	10	26